


## Web Portal Configuration (Setup & Publish)


Below steps to configure web portal of AIMS in system.

To install new X-force alarm web application · Double click on the given new setup file · Click Next till you get option Finish.

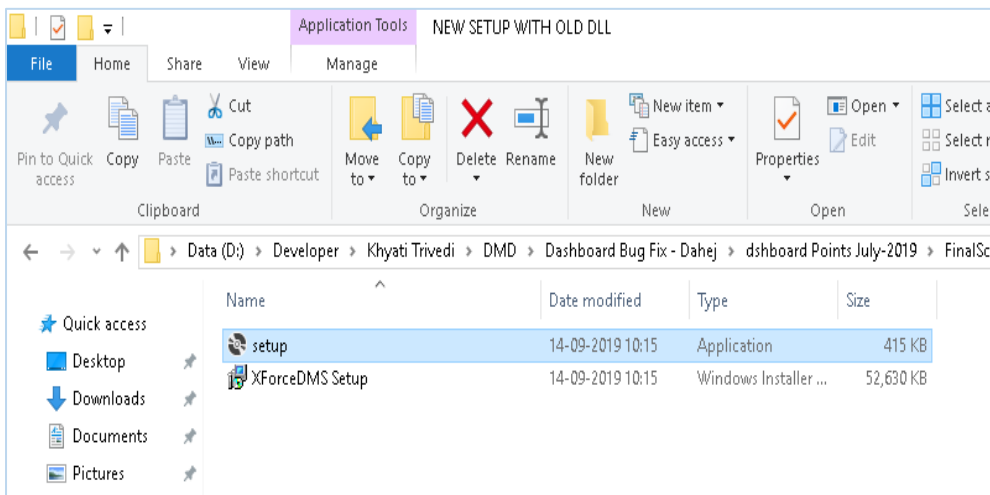

After finish Setup > Go to path C:\inetpub > Right click on folder named **wwwroot** > Go to security tab · Check that it has **everyone** rights or not. If not then give everyone rights to this folder.

Note: To access folder from C: / drive to IIS, Everyone rights are mandatory.

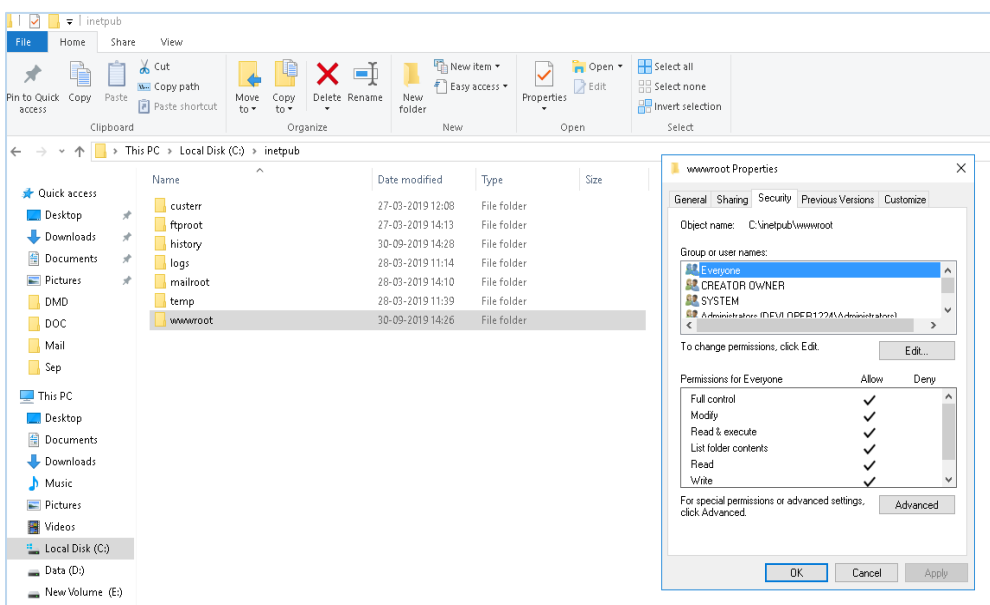

To publish XAIMS folder > Click windows button > Write IIS > Open IIS in Administrator mode > Refresh **Sites** folder in Connection pan (left side area) in IIS.




You will have your folders with yellow icon > Right click on that folder > Convert to Application > OK.

Now you will have blue earth icon besides your folder.


Click on your folder in connection path.

Go to Actions Tab (right side) > Click on Browse\*:80(http)

Your alarm web application is started.

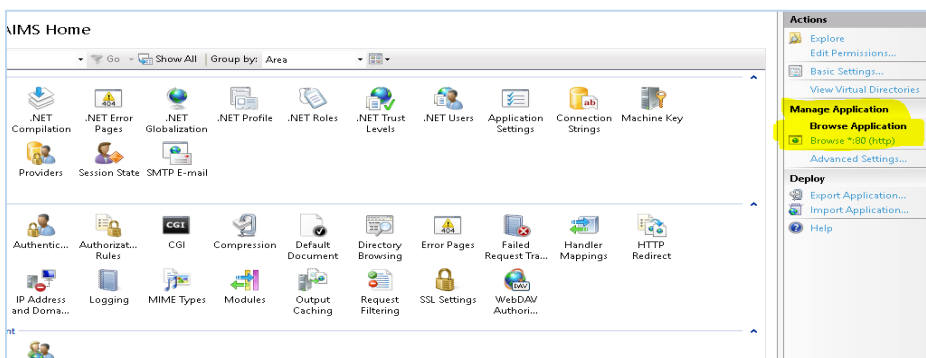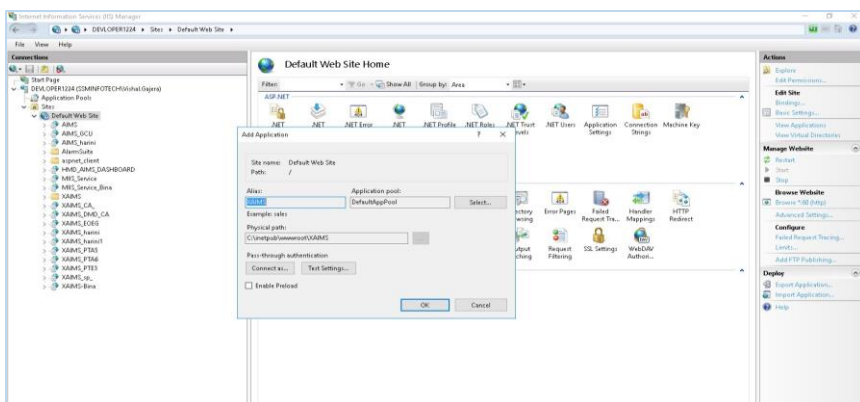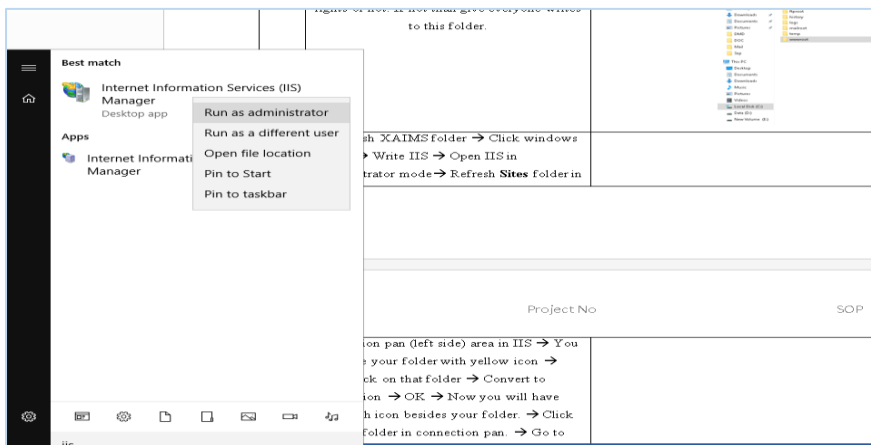

You can see now Login page as below mentioned screen-

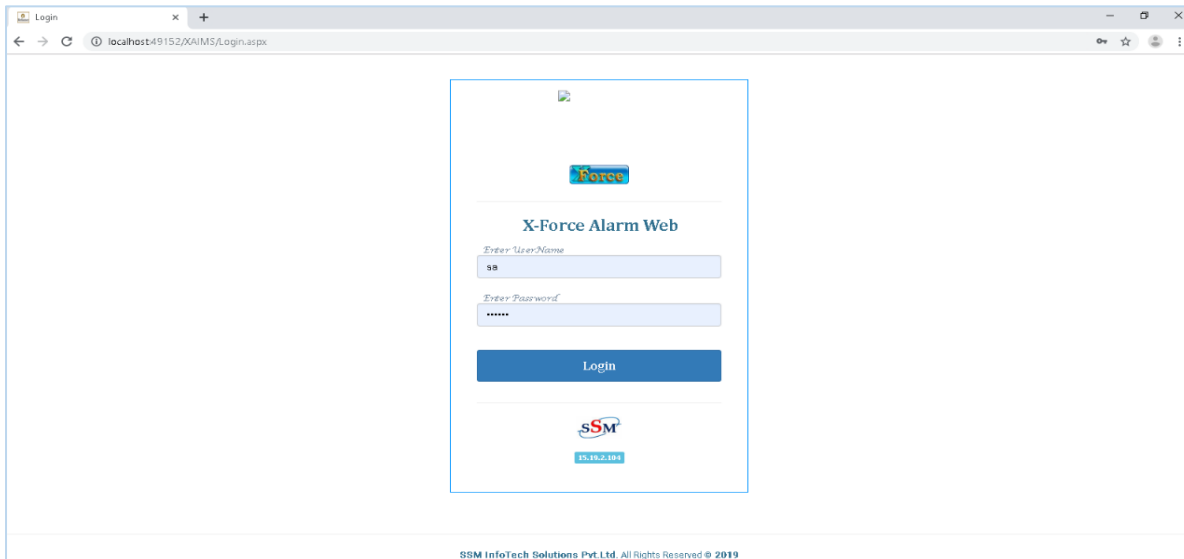

Force

X-Force Alarm Web

Enter UserName

ss

Enter Password

\*\*\*\*\*

Login

SSM

V1.00.2.104

SSM InfoTech Solutions Pvt.Ltd. All Rights Reserved © 2019