


1) Requirement :-




1. Open the a Hyper Terminal Private Edition(hyper terminal.exe) .

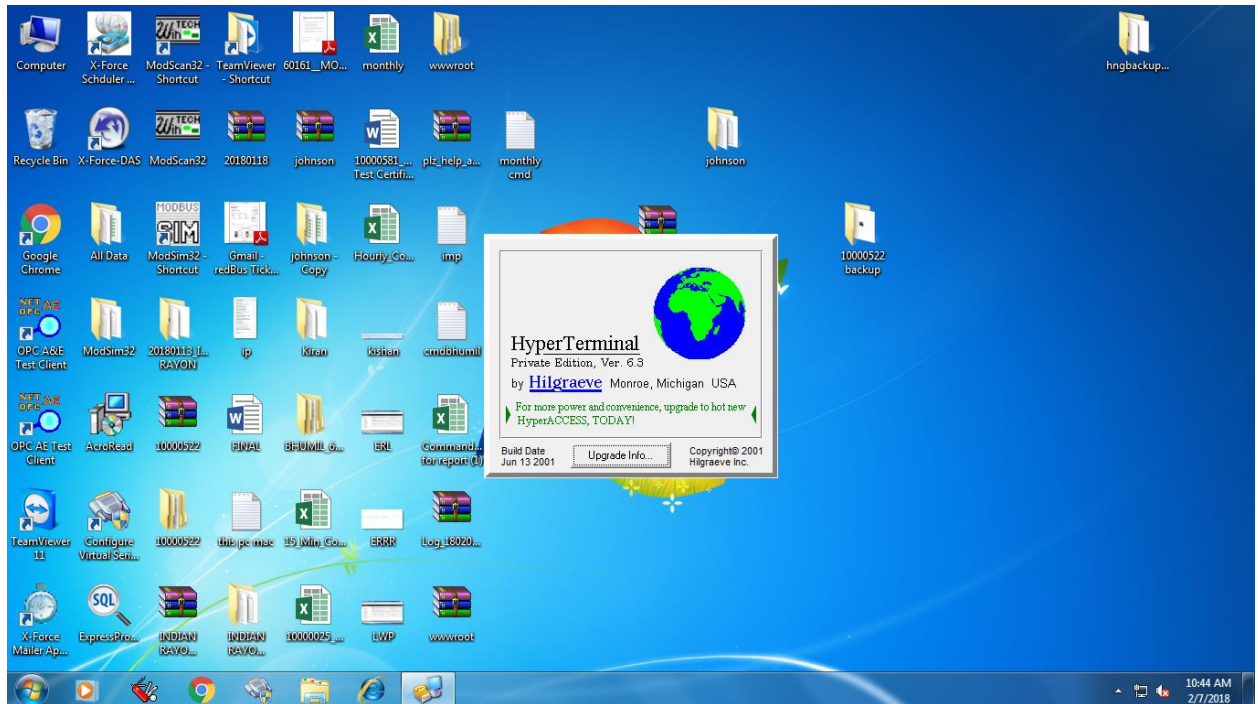


2. Open new screen.

Name: Blank space Any Name type

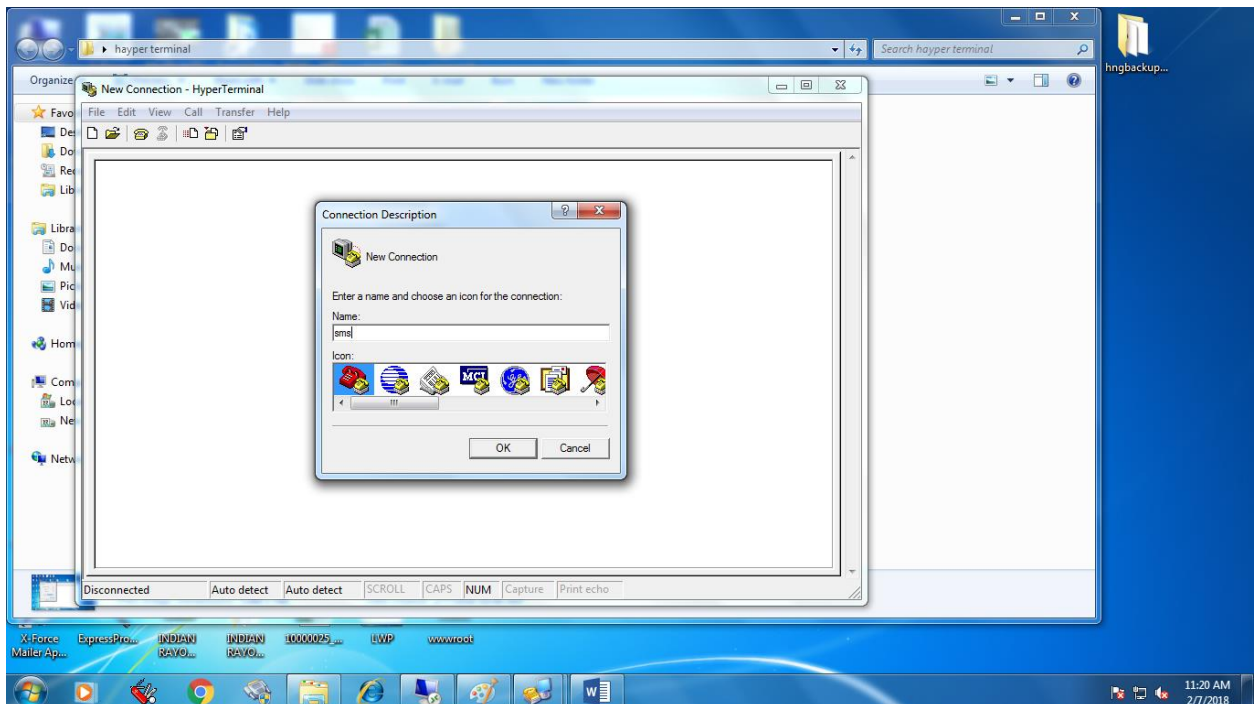

Click on the ok Button.

3. Open the new screen.

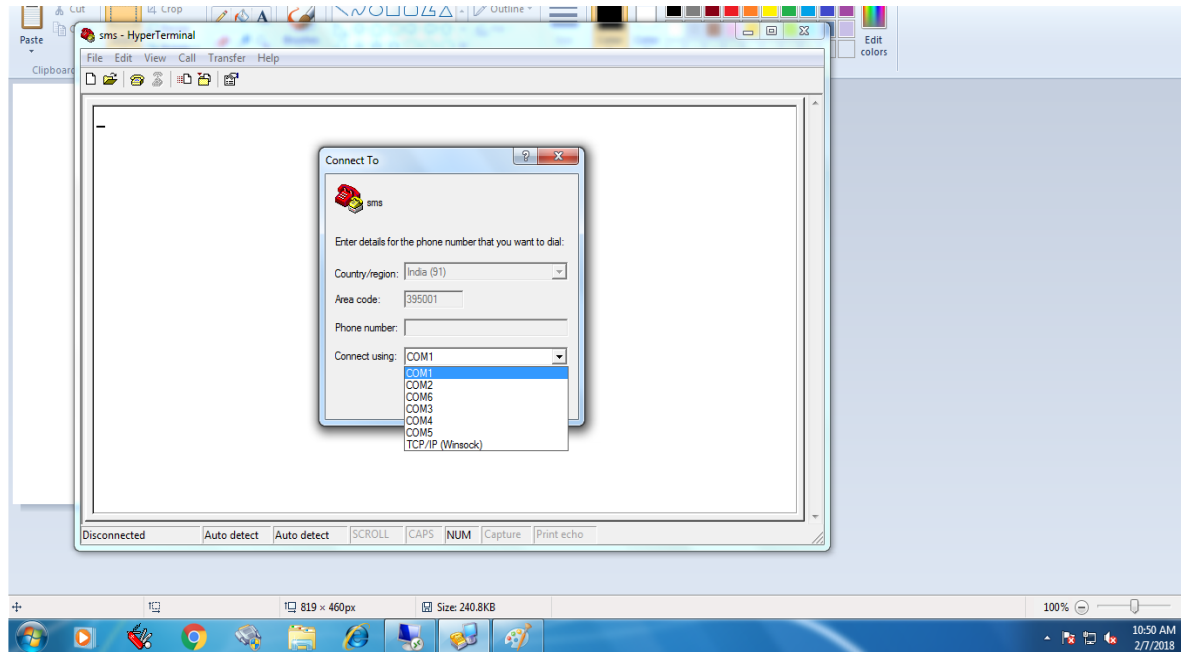


- Select the connect Using. Ex: com1, com2, com3 etc.

4. Open new screen.


Select the information.

- Bits per second: 115200
- Data bits : 8
- Parity : None
- Stop bits : 1
- Flow control : None

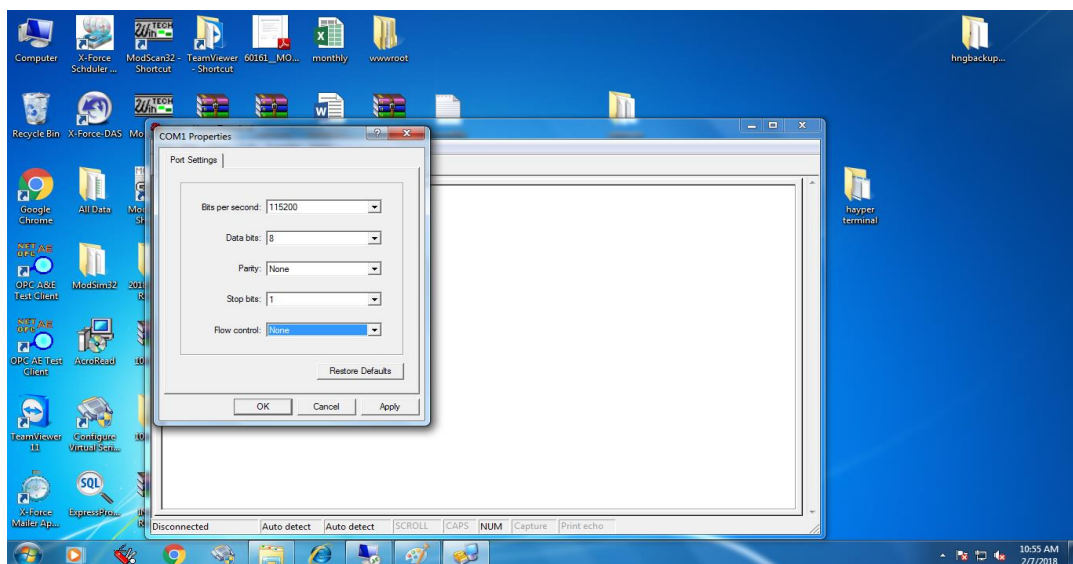

- Click on the Apply Button.
- Click on the ok Button.

5. Open the blank screen.

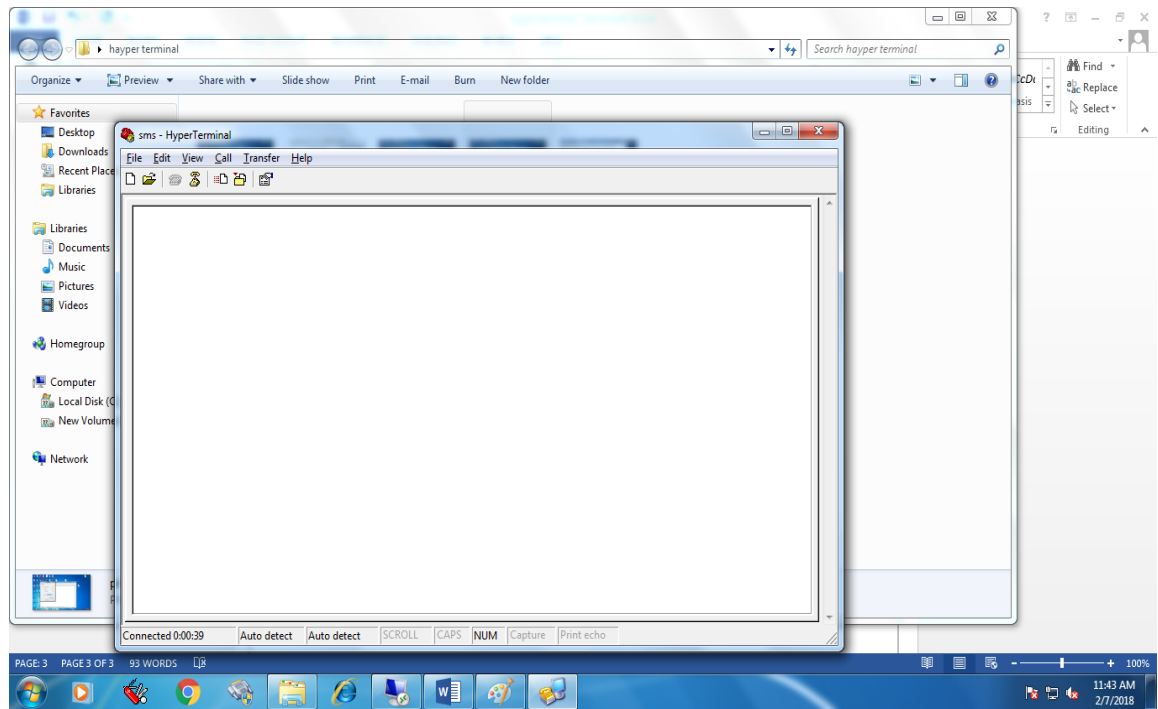


- Check the command.


(1)
At -> click Enter Button -> ok
Ctrl + cmgr=1 -> click Enter Button
Example: 9067899556

(2)
 - click on the file.
 - Select properties.
 - Open screen.


HYPER TERMINAL PRIVATE EDITION

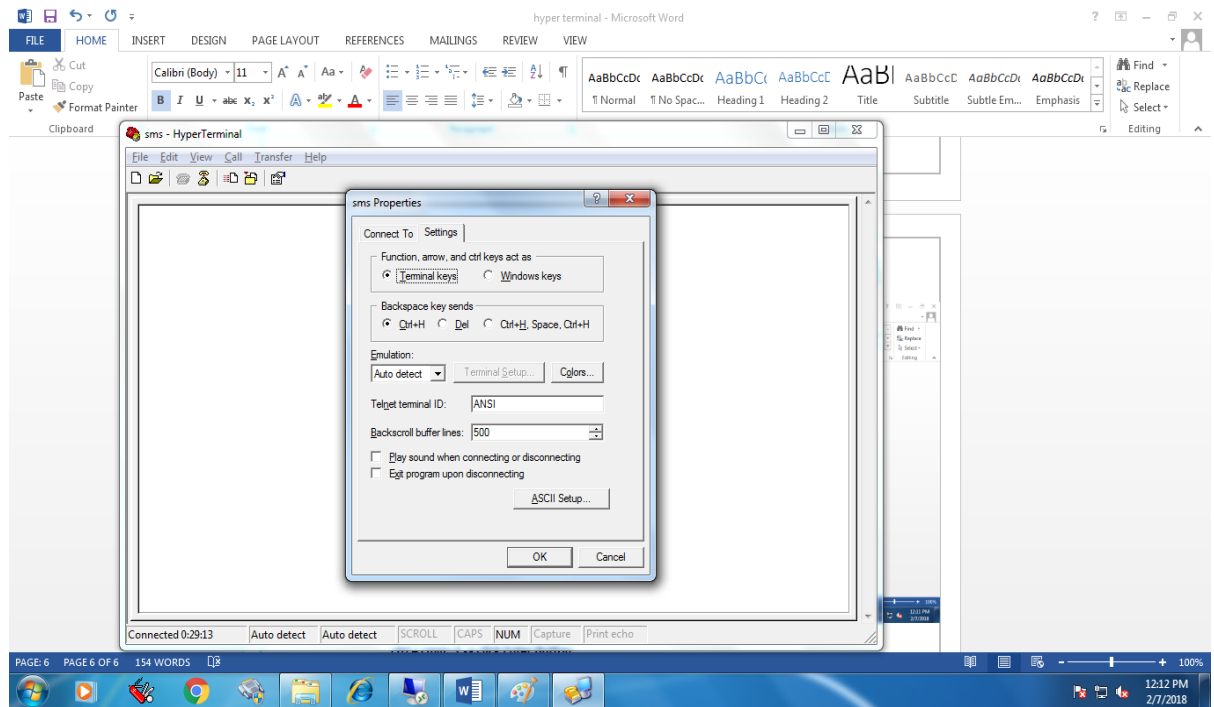

- Two option Connect To and Setting.
- Click on Settings.

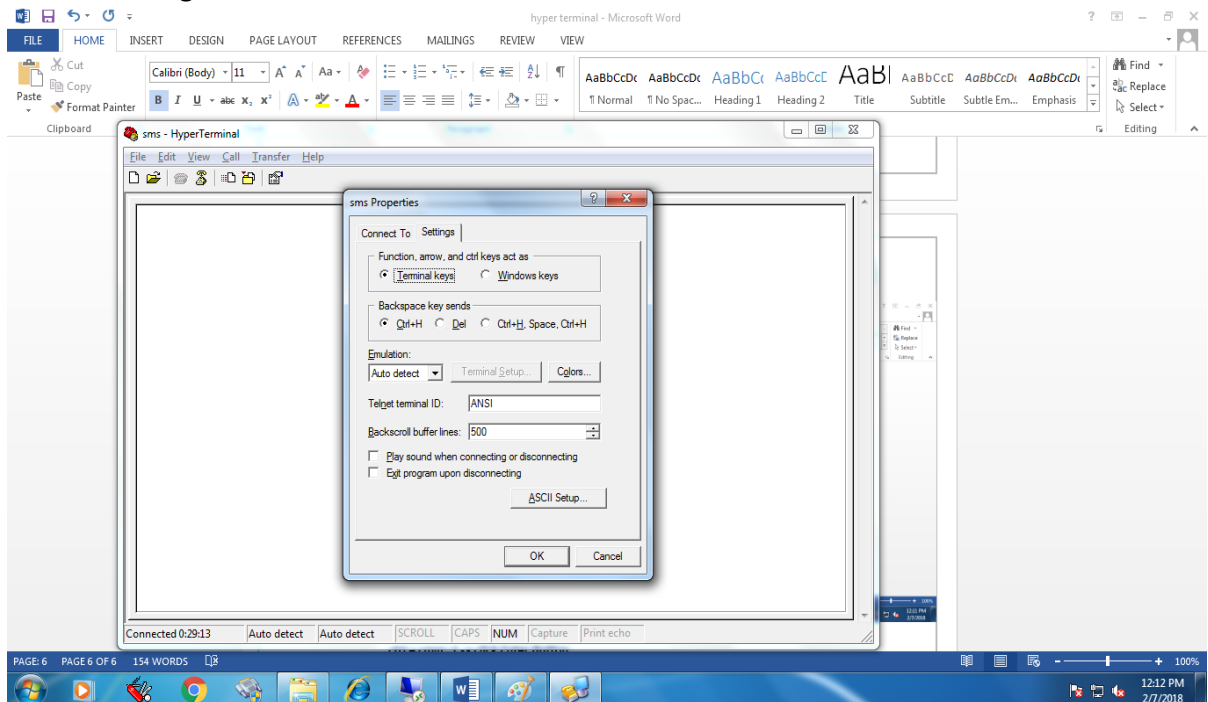

- Click on ASCII SETUP button.

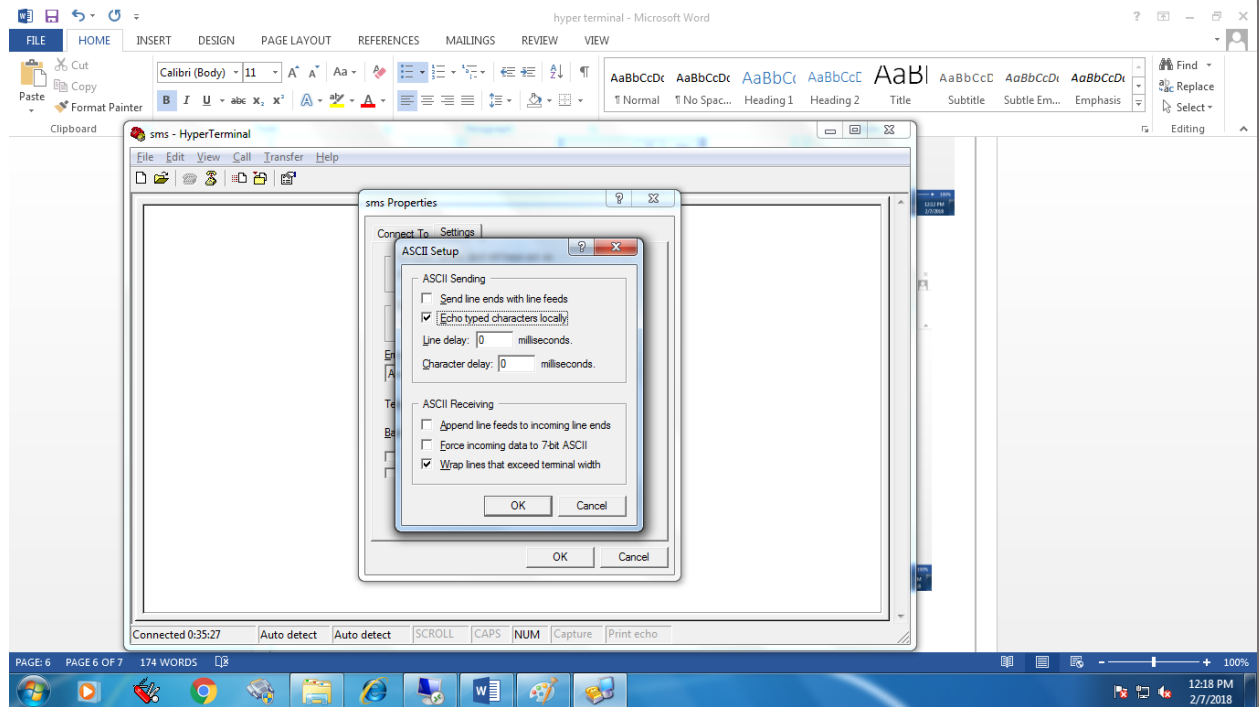

- Select Echo typed characters locally.
- Click ok button.
- Open blank screen.
- Type the command.

(2)

Aatt + click Enter Button -> ok

Ctrl + cmgr=1 -> click Enter Button

Example: 9067899556

→ Next process pending